




Stairway landings, ramps, and walkways

Falls from elevation are one of the leading causes of injuries to construction workers in British Columbia.


- Stairways complete with handrails must be installed before beginning work on the next floor level.
- Stairs with more than four risers must have continuous handrails installed.
- Stairway landings, ramps, and walkways that are 1.2 m (4 ft.) or more above grade must have guardrails.



The slope of work platforms must not exceed one vertical to five horizontal. Slope work platforms must have cleats spaced no more than 400 mm (16 in.) apart or a non-skid surface.

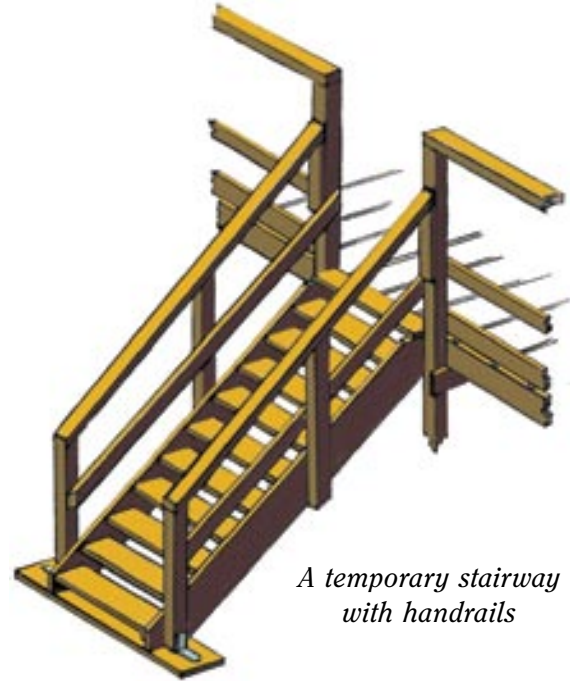


A temporary stairway with handrails

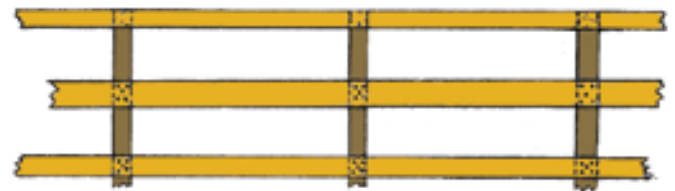

This image shows a detail of a standard guardrail.

- Workers must be prevented from falling when working 3 m (10 ft.) or more above grade. Standard guardrails or fall protection equipment must be used for this purpose.

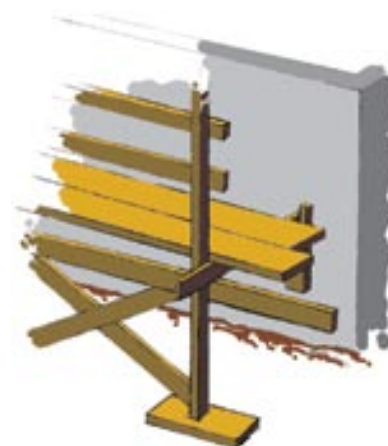

Guardrails are required when the work platform is 3 m (10 ft.) or more above grade.

Project: _____ Address: _____

Employer: _____ Supervisor: _____

Date: _____ Time: _____ Shift: _____

Number in crew: _____ Number attending: _____

Other safety issues or suggestions made by crew members:

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: _____

Manager: _____ Supervisor: _____

(signature)

(signature)



WORKING TO MAKE A DIFFERENCE
worksafebc.com