




## Swing-fall hazards

### Swing-fall hazards

Be careful not to tie off to an anchor in such a way that if you fall, you'll swing into an obstruction.

This is called a swing-fall hazard.

A swing fall can be as harmful as falling to the ground.

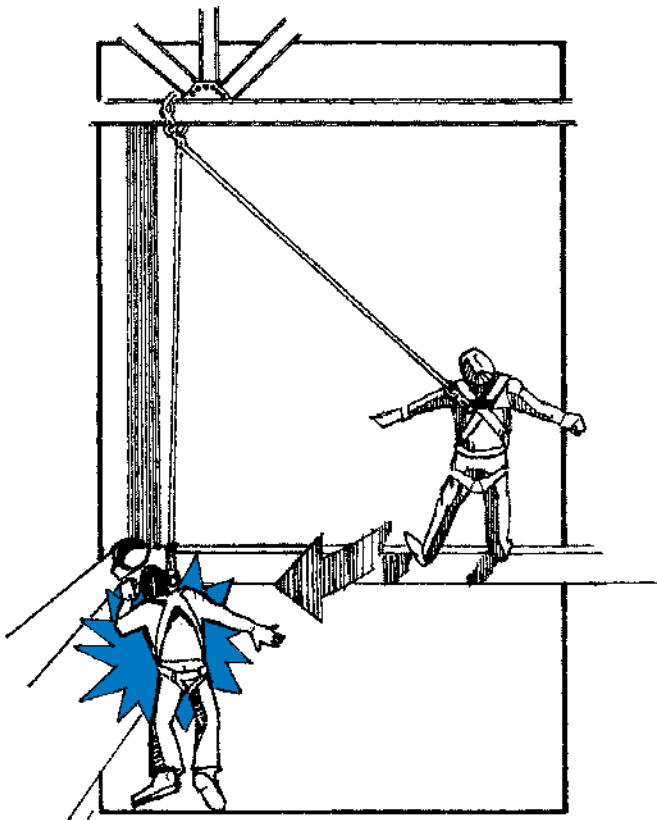


### After a fall

After a fall, immediately remove from service all equipment used to arrest the fall.

You cannot use the equipment again until it has been inspected and approved by one of the following:

- The manufacturer
- An approved agent
- A professional engineer

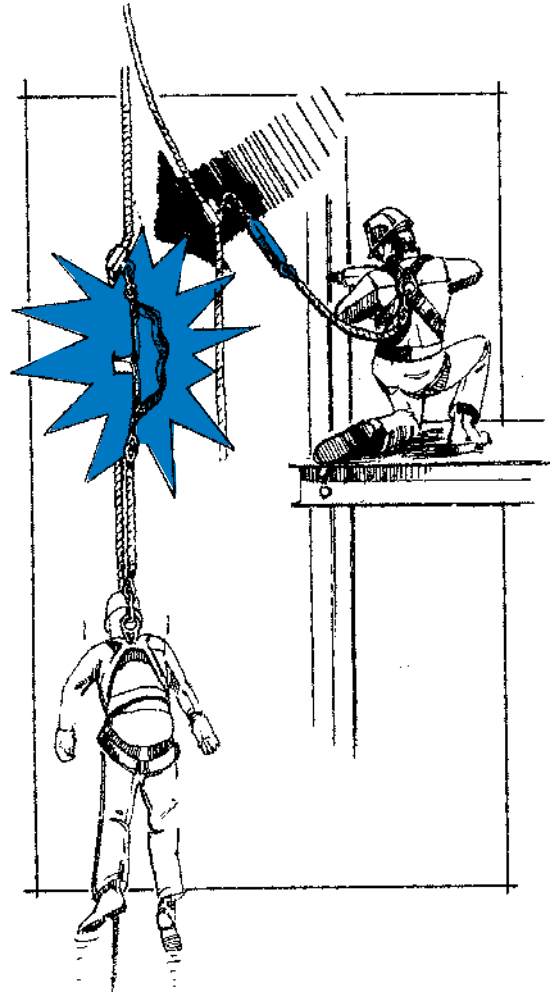

Project: \_\_\_\_\_ Address: \_\_\_\_\_

Employer: \_\_\_\_\_ Supervisor: \_\_\_\_\_

Date: \_\_\_\_\_ Time: \_\_\_\_\_ Shift: \_\_\_\_\_

Number in crew: \_\_\_\_\_ Number attending: \_\_\_\_\_

Other safety issues or suggestions made by crew members:

---

---

---

---

---

---

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: \_\_\_\_\_

---

Manager: \_\_\_\_\_ Supervisor: \_\_\_\_\_

*(signature)*

*(signature)*



WORKING TO MAKE A DIFFERENCE  
worksafebc.com